



HOW-TO GUIDE

TRANSCENDENT RECORDERS: QUICK START WIZARD SETUP




PLEASE NOTE:

Complete User Guide, Software, Tools, and Updates are available online. Scan the QR Code or visit:
<https://vitekccctv.com>

Transcendent Recorders

Quick Start Wizard Setup

Click on Wizard Set up to start Quick Setup or click Skip to exit quick wizard set up

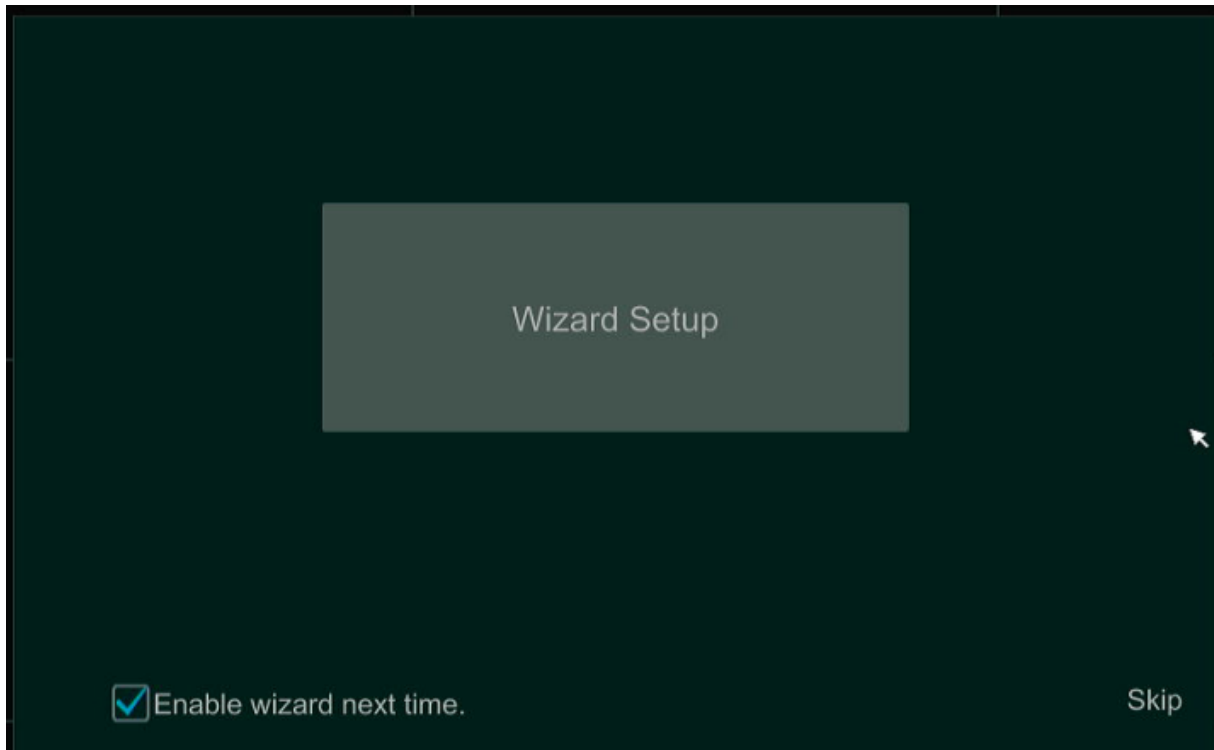

Network

Obtain an IP address automatically- check so router can give next available IP address to unit. Uncheck to set manually.

Please consult local IT Dept. or scan network before manually address to prevent IP conflict.

Obtain DNS automatically- For best result when using QR code(p2p) or external IP, uncheck and set to following

Preferred DNS 8.8.8.8

Alternate DNS 8.8.4.4

HTTP: default 80, if you change port you must enter IP address: port number

***Example below would be <http://192.168.1.35:XXX> if changed from 80

Wizard


Network Settings > Add Camera > Record Settings > QRCode > Cloud Upgrade

Ethernet Port 1 (Online)		Internal Ethernet Port (Online)	
☒ Obtain an IP address automatically		Address	10 . 151 . 151 . 1
Address	192 . 168 . 1 . 35	Subnet Mask	255 . 255 . 255 . 0
Subnet Mask	255 . 255 . 255 . 0	Mode	Non-long line mode ▼
Gateway	192 . 168 . 1 . 1		
☒ Obtain DNS automatically			
Preferred DNS	192 . 168 . 1 . 1		
Alternate DNS			
Port			
HTTP Port	80	HTTPS Port	443
Server Port	6036		

Previous
Next
Cancel


ADD CAMERA

Cameras on same local network or on POE switch will appear here. Once you address them to same local network as Device you can add them by click + button or Add All.

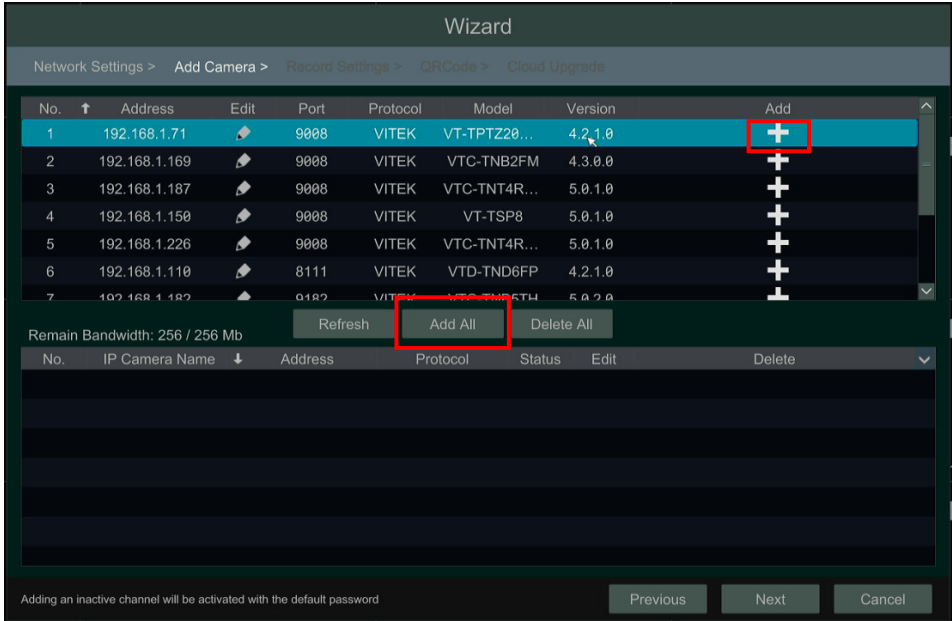

You can edit IP by click on Pencil icon under edit and address camera

Please consult local IT Dept. or scan network before manually address to prevent IP conflict.

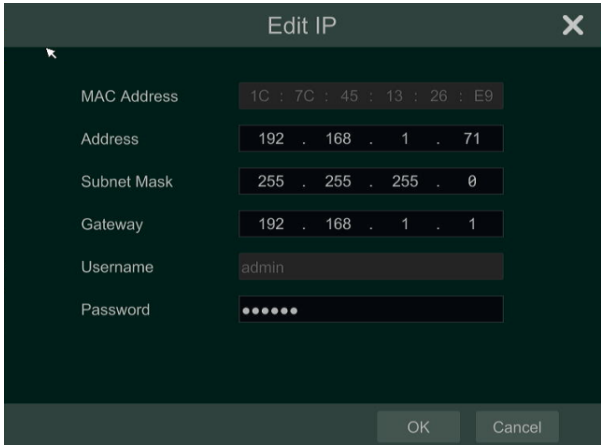

RECORD SETTINGS

One click recording program. Select from different default settings.

Wizard

Network Settings > Add Camera > Record Settings > QRCode > Cloud Upgrade

Mode

Auto

☐ Motion Record

☐ Sensor Record

☐ Motion Record+Sensor Record

☐ Always(24x7) Record+Motion Record

☐ Always(24x7) Record+Sensor Record

☐ Always(24x7) Record+Motion Record+Sensor Record

☒ Always(24x7) Record+Motion Record+Sensor Record+AI Record


Advanced

Previous

Next

Cancel


If you require a special program, click on Advanced, select and create you own special recording program

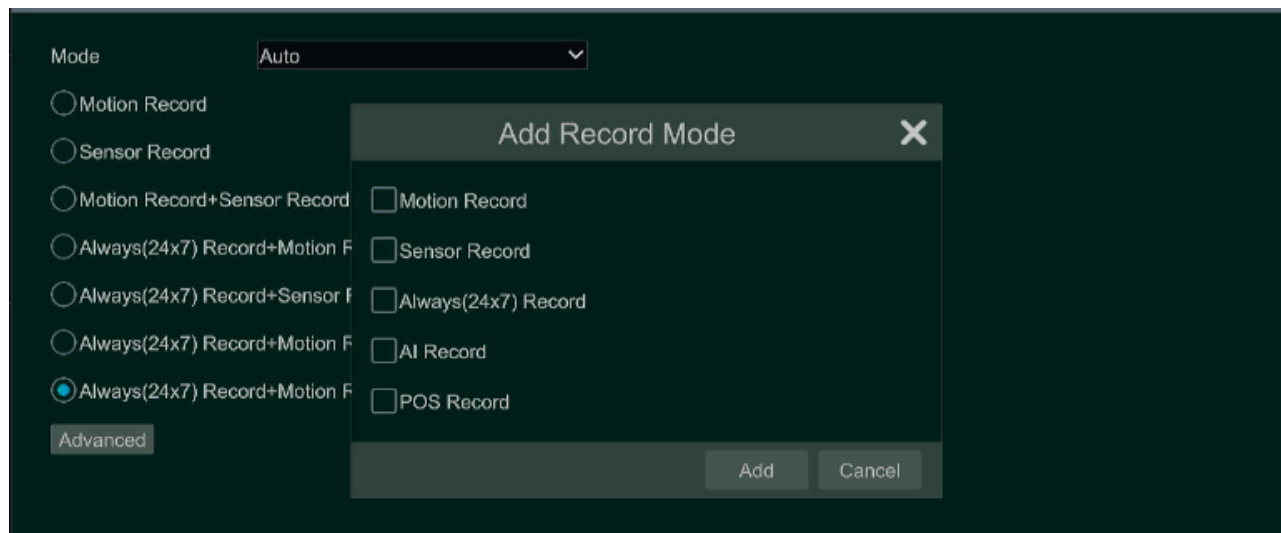

QRCODE/NAT OR P2P

click NAT to enable and then scan code on Transcendent App to view camera system.

Transcendent App available for I-Phone and Android

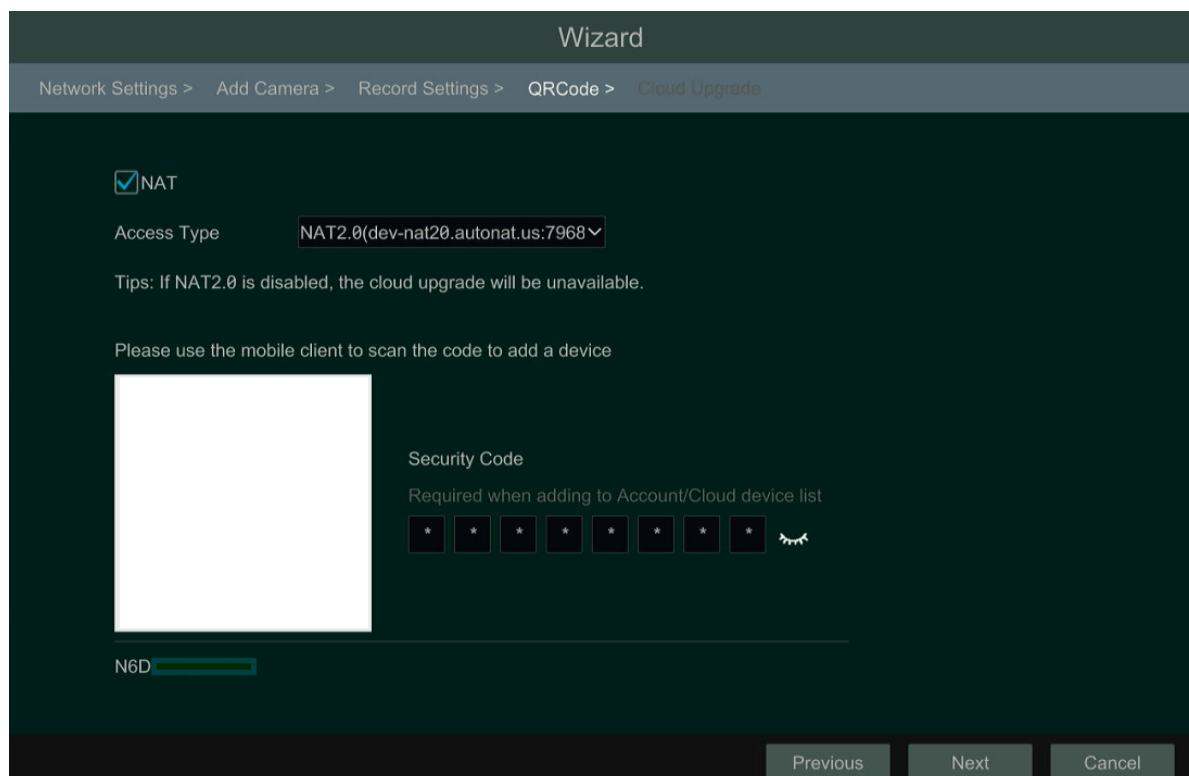

CLOUD UPGRADE

For future upgrades

Wizard

Network Settings >

Add Camera >

Record Settings >

QRCode >

Cloud Upgrade

☒ Cloud Upgrade

Tips: To enable cloud upgrade, you need to enable NAT2.0

Current Version

1.4.7.53873B221008.N4I.U1(32A88G)Release Date 2022.10.08

Notice:

Dear users, in order to ensure cyber security when offering you better convenience on information management, we shall provide you with more secure and reliable services when bounded by laws & regulations and following privacy protection principles.

The concept of privacy protection has been executed in the whole product/service development process, under the consideration of comprehensive factors as law, product, design, etc.

We shall collect information in accordance with the principles of legality, legitimacy, and necessity.

When you enable the cloud upgrade, in order to ascertain the feasibility of upgrading current version to the latest, and the functionality of the device, we will extract the following information:

1, current software version information.

We will not extract the following information on your device:

1, personal configuration

2, task information

Previous

OK

Cancel

UP and Running

What do the icons mean:

Blue Circle- Recording 24/7

Yellow Circle- Recording Event

Yellow Stick figure man: Motion is Active on Camera

Teal PTZ- Camera has PTZ function like motorize lens or full function PTZ (Pan, Tilt, Zoom) Capability.

