

VTM-TLM19L/21L/24L

Transcendent 19.5" / 21.5" / 23.6" HDMI and VGA
CCTV Monitor with Full HD Display (1080P)

VITEK[®]
INDUSTRIAL VIDEO PRODUCTS, INC.
VITEKCCTV.COM
(888) VITEK-70



TRANSCENDENT

VTM-TLM21L /
VTM-TLM19L


VTM-TLM24L



KEY FEATURES


- 19.5" Display (VTM-TLM19L) / 21.5" Display (VTM-TLM21L) / 23.6" Display (VTM-TLM24L)
- 16 : 9 Aspect Ratio
- Full 1080p High Def. Display (1920 x 1080) / (1600 x 900 on VTM-TLM19L)
- Contrast Ratio of 1000:1
- HDMI / VGA Input
- Audio In (2 x Speakers)
- 5ms Response Time
- 178° Horizontal and Vertical Viewing Angle (178 / 170° on VTM-TLM19L)
- LED Backlit
- 100mm VESA mount
- Professional grade display designed for 24/7 continuous use in security applications with 50,000 Hour Panel Life
- 3 Year Warranty

DIMENSIONS / REAR PORTS

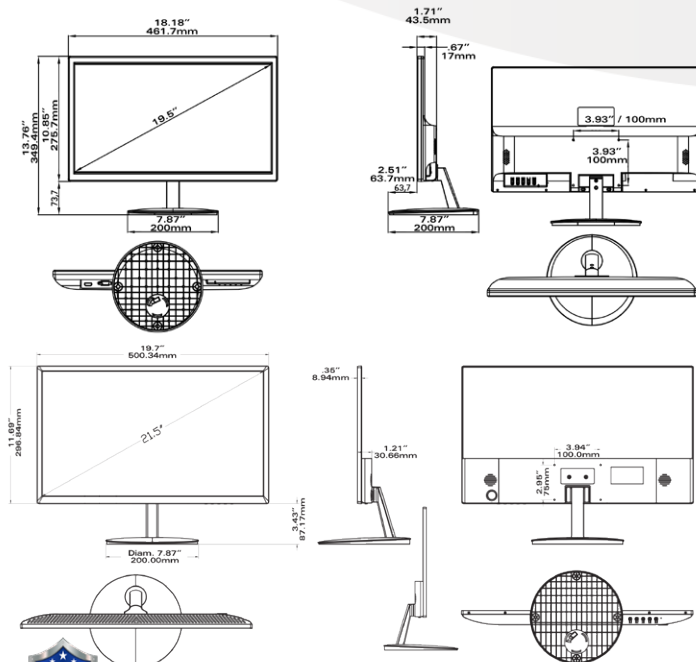

SPECIFICATIONS

Panel Type	19.5" / 21.5" / 23.6" LED Backlit Monitor
Resolution	1920 x 1080 (1600 x 900 on VTM-TLM21L)
Aspect Ratio	16:9
Contrast Ratio	1000:1
Brightness	250 cd/m ²
Response Time	5ms
Colors	16.7M
Viewing Angle (H/V)	178° / 178° (VTM-TLM21L, VTM-TLM24L) 178° / 170° (VTM-TLM19L)
Inputs	1 x HDMI, 1 x VGA
Audio	1 x Audio (2 Speakers)
Power consumption	<18W (VTM-TLM19L), <21W (VTM-TLM21L), <25W (VTM-TLM24L)
VESA Mounting	100 x 100mm
Auto adjustment	Yes
OSD Control	Yes
Working Temp	32~104°F (0~40°C)
OSD Language	English, Spanish, French, German, Italian, Dutch, Russian, Chinese
Accessories	Power Cord, Adapter, Stand, User Guide, HDMI Cable
Certificates	FCC-DOC, CE, ROHS
VTM-TLM19L Dimensions	With Stand: 18.18 x 13.76 x 7.87" (461.7 x 349.4 x 200mm) W/out Stand: 18.18 x 10.85 x 1.71" (461.7 x 275.7 x 43.5mm)
VTM-TLM21L Dimensions	With Stand: 19.70 x 15.12 x 7.87" (500 x 384 x 200mm) W/out Stand: 19.70 x 11.69 x 1.21" (500 x 297 x 31mm)
VTM-TLM24L Dimensions	With Stand: 21.88 x 16.05 x 8.66" (556 x 408 x 220mm) W/out Stand: 21.88 x 13.17 x 1.82" (556 x 334 x 46mm)
Weight: 19L, 21L, 24L	5.62lb 5.85lb / 7.94lb

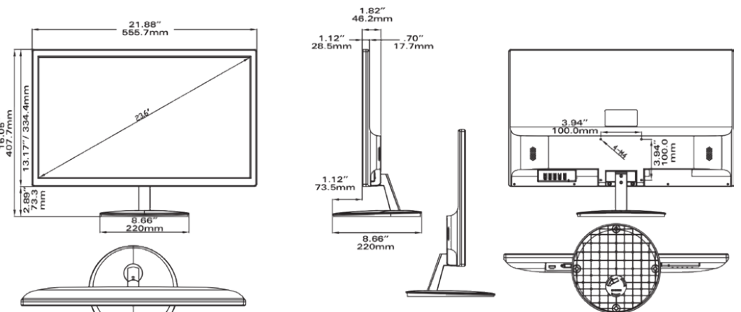

(888) VITEK-70 • WWW.VITEKCCTV.COM

An Eye On
Innovation